



Material :



- (a) Housing : PA66(UL94V-0)
- (b) Pin Header : Brass , Tin Plated
- (c) Nut : Brass

Electrical :


- | | | |
|---|------|------|
| | UL | IEC |
| 1.Rated Voltage : | 300V | 320V |
| 2.Rated Current : | 15A | 20A |
| 3.Withstanding Voltage : AC1600V/1Min. | | |
| 4.Operating Temperature : -40 °C~+105°C | | |
| 5. RoHS Compliance | | |
| 6.Safety Approval : | | |
| 7.Undimensioned Tolerances: | | |

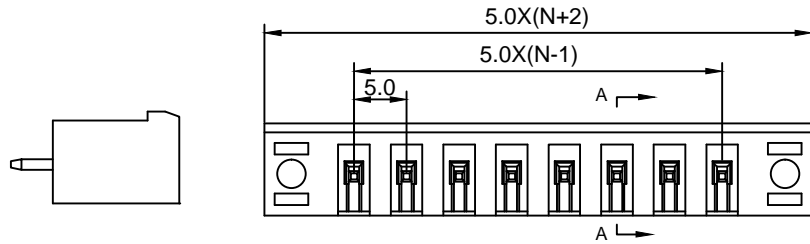


Pitch Range In mm			Nominal Dimension Range In mm					-	∩	∇
≤6	6 ~ 10	10 ~ 24	≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150	0.05/10		
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00	±0.1°		

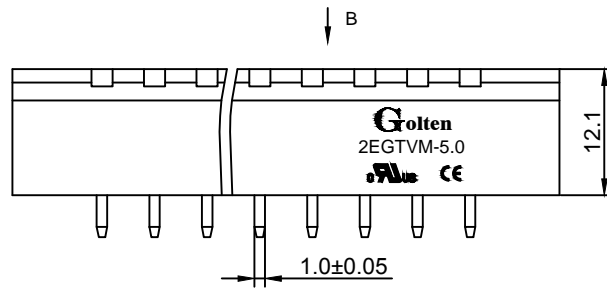

- ① Series NO.
- ② Pitch
- ③ Poles
02 02Contacts
03 03Contacts
...
24 24Contacts
- ④ 1 Single Pitch
2 Double Pitch
- ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green(Standard For AH)
5 Orange
6 Red
7 Transparent
8 Yellow
9 White
- ⑥ Customer Request: 100--Standard
- ⑦ AH--Standard(PA66)

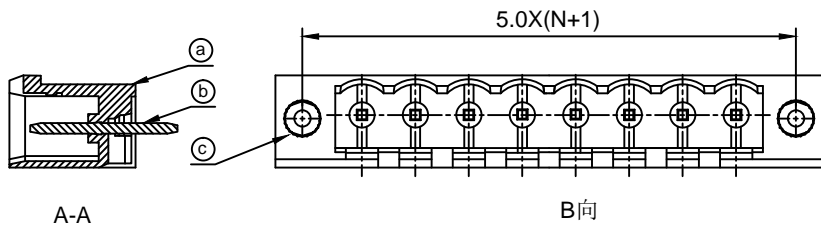

DETACHED LISTS	Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.							
	APPD: MA_4/11/17'	PART NO. 2EGTVM-5.0-XXP-XX-100AH						
	CHKD: Yu_4/10/17'							
	DRFT: Chen_4/9/17'							
 THIRD ANGLE PROJECTION		<table border="1"> <tr> <td>REV</td> <td>1</td> </tr> <tr> <td>SHEET</td> <td>1/1</td> </tr> <tr> <td>SCALE</td> <td>1/1</td> </tr> </table>	REV	1	SHEET	1/1	SCALE	1/1
REV	1							
SHEET	1/1							
SCALE	1/1							

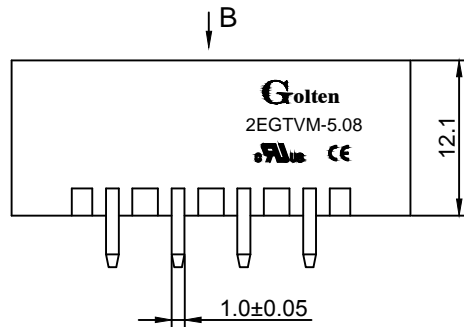



Material :

- (a) Housing : PA66(UL94V-0)
- (b) Pin Header : Brass , Tin Plated
- (c) Nut : Brass

Electrical :


- 1. Rated Voltage : 300V UL IEC
- 2. Rated Current : 15A 320V 20A
- 3. Withstanding Voltage : AC1600V/1Min.
- 4. Operating Temperature : -40°C~+105°C
- 5. RoHS Compliance
- 6. Safety Approval :
- 7. Undimensioned Tolerances:

Pitch Range In mm			Nominal Dimension Range In mm					—	∩	∇
≤6	6 ~ 10	10 ~ 24	≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150	0.05/10		
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00	±0.1°		

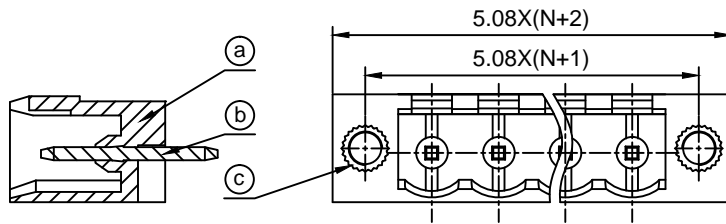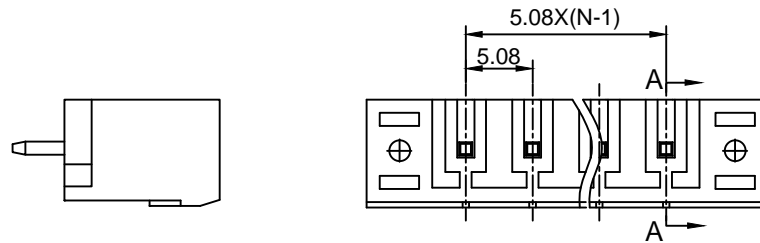


A-A

A向

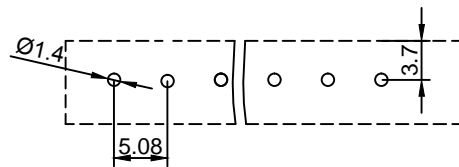


PCB Layout



- ① Series NO.
- ② Pitch
- ③ Poles
02 02Contacts
03 03Contacts
...
24 24Contacts
- ④ 1 Single Pitch
2 Double Pitch
- ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green(Standard For AH)
5 Orange
6 Red
7 Transparent
8 Yellow
9 White
- ⑥ Customer Request: 00--Standard
- ⑦ AH--Standard(PA66)

DETACHED LISTS	Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.	
	APPD: MA_4/11/17'	PART NO. 2EGTVM-5.08-XXP-XX-00AH
	CHKD: Yu_4/10/17'	
	DRFT: Chen_4/9/17'	
	THIRD ANGLE PROJECTION	
	MM (INCH)	DO NOT SCALE DRAWING
		REV 1
		SHEET 1/1
		SCALE 1/1

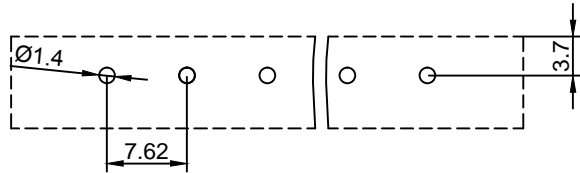



PCB Layout

Material :

- (a) Housing : PA66(UL94V-0)
- (b) Pin Header : Brass , Tin Plated
- (c) Nut : Brass



Electrical :

- 1.Rated Voltage : 300V UL IEC 400V
- 2.Rated Current : 15A 20A
- 3.Withstanding Voltage : AC1600V/1Min.
- 4.Operating Temperature : -40°C~+105°C
- 5. RoHS Compliance
- 6.Safety Approval :
- 7.Undimensioned Tolerances:

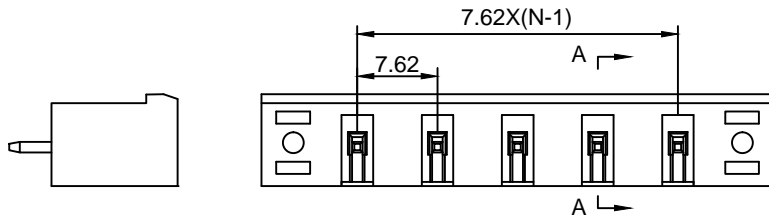


Pitch Range In mm			Nominal Dimension Range In mm					—	∩	∇
≤6	6 ~ 10	10 ~ 24	≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150	0.05/10	∠	
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00	±0.1°		

B

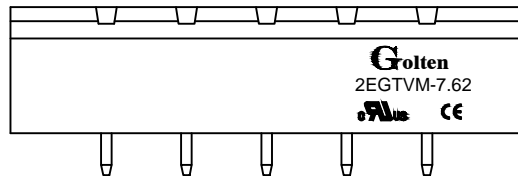

- ① Series NO.
- ② Pitch
- ③ Poles
02 02Contacts
03 03Contacts
...
24 24Contacts
- ④ 1 Single Pitch
2 Double Pitch
- ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green(Standard For AH)
5 Orange
6 Red
7 Transparent
8 Yellow
9 White
- ⑥ Customer Request : 100--Standard
- ⑦ AH--Standard(PA66)

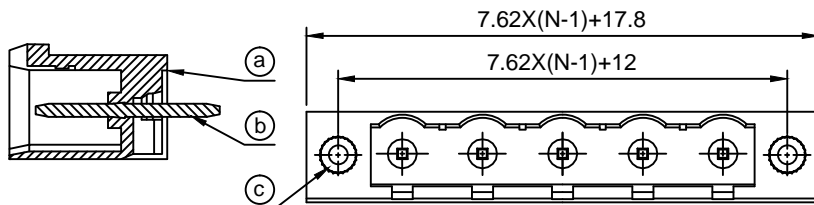

A-A

B向

DETACHED LISTS	Golten 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.	
	APPD: MA_4/11/17'	PART NO. 2EGTVM-7.62-XXP-XX-100AH
	CHKD: Yu_4/10/17'	
	DRFT: Chen_4/9/17'	
	THIRD ANGLE PROJECTION	
	MM (INCH)	DO NOT SCALE DRAWING