

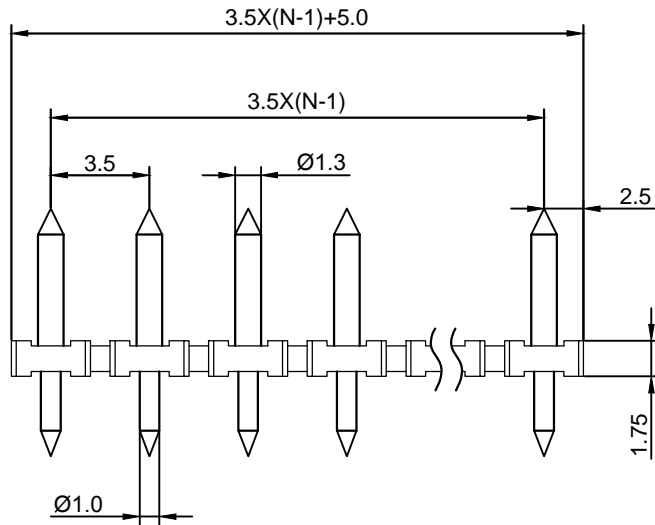


Material :

- (a) Housing : PA6T+GF(UL94V-0)
- (b) Pin Header : Brass , Tin Plated

Electrical :

- 1.Rated Voltage : 300V UL IEC 250V
- 2.Rated Current : 8A 10A
- 6.Withstanding Voltage : AC2000V/1Min.
- 7.Operating Temperature : -40°C~+105°C
- 8.RoHS Compliance
- 9.Safety Approval : 
- 10.Undimensioned Tolerances:





Pitch Range In mm			Nominal Dimension Range In mm					—	∩	∇
≤6	6 ~ 10	10 ~ 24	≤30	30 ~ 60	60 ~ 100	100 ~ 150	>150	0.05/10		
±0.10	±0.15	±0.25	±0.20	±0.30	±0.50	±0.70	±1.00	±0.1°		

GT333J - 3.5 - XXP - X X - 00 AH

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No.
- ② Pitch
- ③ Poles
- ④ 1 Single Pitch
2 Double Pitch
- ⑤ Color: 1 Grey
2 Blue
3 Black(Standard For AH)
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White
- ⑥ Customer Request : 00--Standard
- ⑦ AH--Standard(PA6T+GF)

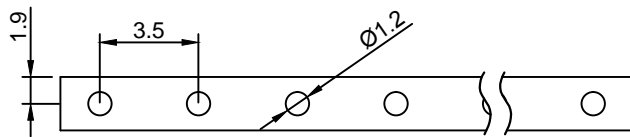

DETACHED LISTS	Grolten [®] 宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.	
	APPD: MA_8/13/16'	PART NO. GT333J-3.5-XXP-XX-00AH
	CHKD: Yu_8/12/16'	
	DRFT: Chen_8/11/16'	
 THIRD ANGLE PROJECTION	MM (INCH)	DO NOT SCALE DRAWING
	REV 1	SHEET 1/1
	SCALE 1/1	