
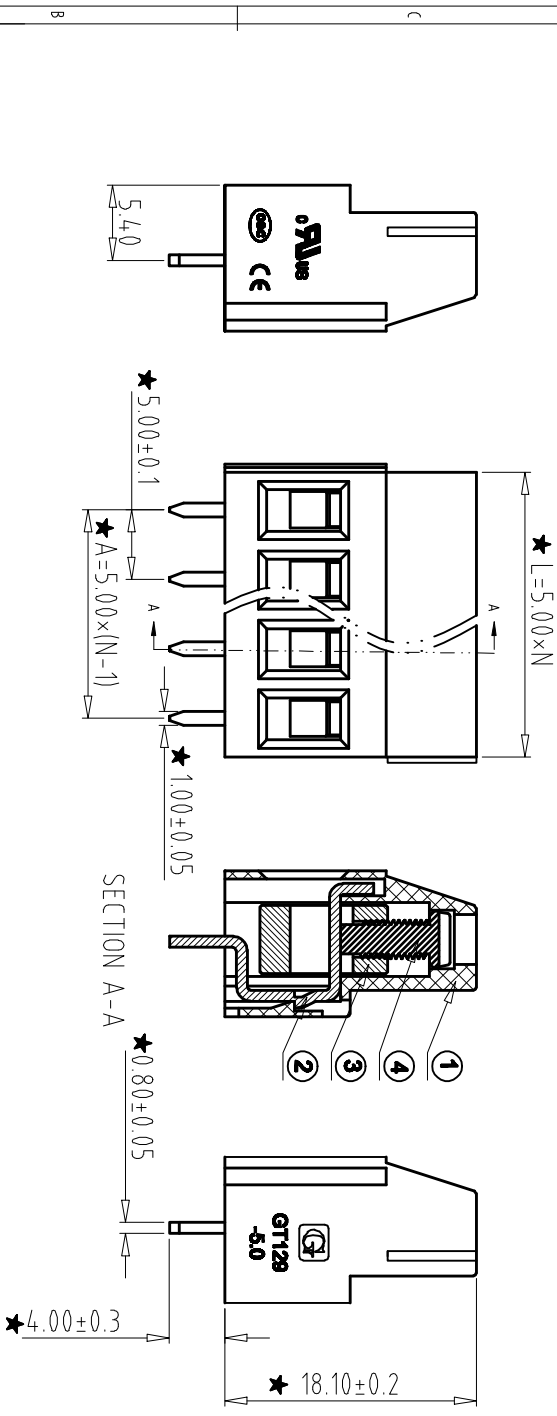


REV	CONTENT	CHK	DATE
V0.0	CONTENT	CXL	20.05.11
V0.1	增加燕尾	MYZ	22.01.15
V0.2	更新图纸	LZW	23.04.14

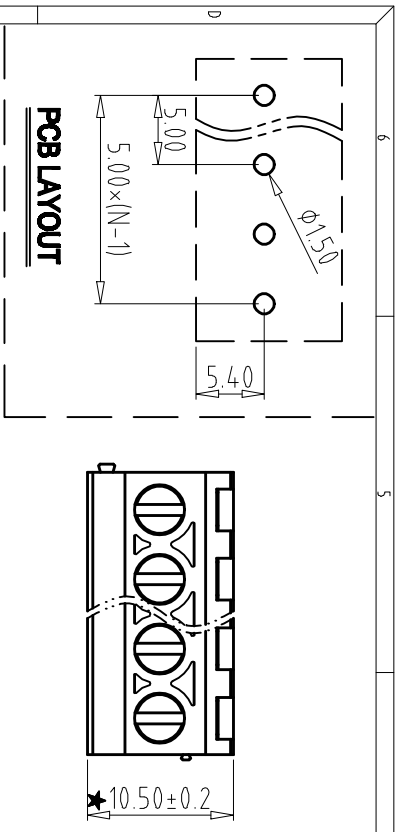

Electrical :

UL	IEC
1. Rated Voltage : 300V	250V
2. Rated Current : 20A	20A
3. Torque Value : M3, 4.49IbIn	M3, 0.5N.m
4. Wire Range : 26-12AWG	0.5-2.5mm ²
5. Stripping Length : 6-7mm	
6. Withstanding Voltage : AC2000V/1Min.	
7. Operating Temperature : -40°C~+105°C	
8. RoHS Compliance	
9. Safety Approval : SILVUS	
10. * is the key quality control point.	

- GT129 - 5.0 - XXP - X X - 00
- ① Series No.
 - ② Pitch
 - ③ Poles
 - ④ 1 Single Pitch
2 Double Pitch
 - ⑤ Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White
 - ⑥ 24 Pin Request
 - ⑦ 00—Standard

4	SCREW	XX	P	Steel	Zn Plated
3	CAGE	XX	P	Brass	Ni Plated
2	PIN HEADER	XX	P	Brass	Tin Plated
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE				
DWG.	CXL	DATE	20.05.11	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK	DATE	SCALE	1:1	NAME	GT129-5.0-XXP-XX-00				
APP.	DATE	SCALE	1:1	NAME	XXXXXX				

Total Pitch Tolerances		Nominal dimension range	
in mm		in mm	
0	to	0	to
30	53	30	53
70	90	70	90
115	150	115	150
250	350	250	350
500	500	500	500
30	to	30	to
53	70	53	70
90	115	90	115
150	200	150	200
250	320	250	320
30	to	30	to
53	70	53	70
90	115	90	115
150	200	150	200
250	320	250	320
30	to	30	to
53	70	53	70
90	115	90	115
150	200	150	200
250	320	250	320
30	to	30	to
53	70	53	70
90	115	90	115
150	200	150	200
250	320	250	320
30	to	30	to
53	70	53	70
90	115	90	115
150	200	150	200
250	320	250	320