


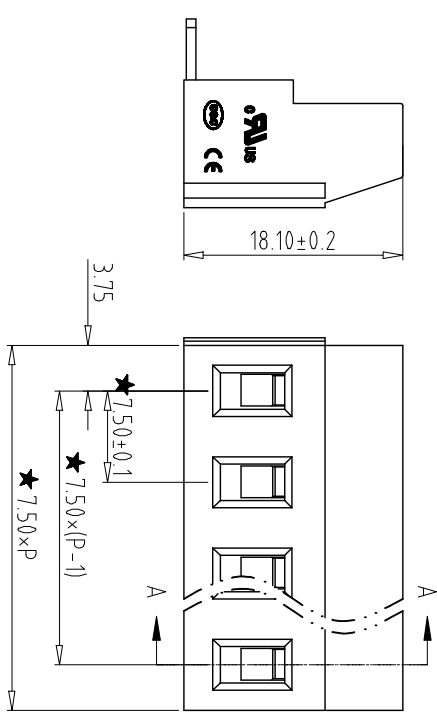
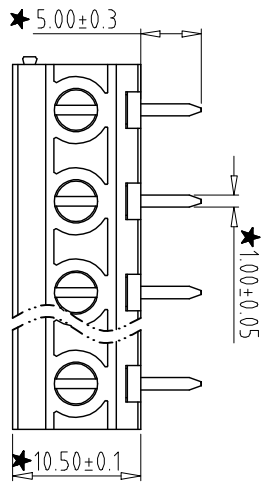


REV	CONTENT	CHK	DATE
V0.0	CONTENT	MYZ	21.06.07
V0.1	更新图纸	LZW	23.04.14

Electrical :

- | | |
|--|--------------------|
| UL | IEC |
| 1. Rated Voltage : 300V | 450V |
| 2. Rated Current : 20A | 20A |
| 3. Torque Value : M3, 4.43lb/in | M3, 0.5N/m |
| 4. Wire Range : 28-12AWG | 2.5mm ² |
| 5. Stripping Length : 6-7mm | |
| 6. Withstanding Voltage : AC2000V/1Min. | |
| 7. Operating Temperature : -40°C--+105°C | |
| 8. RoHS Compliance | |
| 9. Safety Approval : oFALus CE | |
| 10. "*" is the key quality control point | |

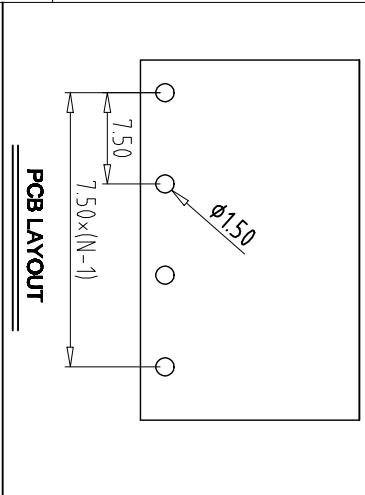

- ① Series NO. ④ 1 Single Pitch ⑤ ⑥
- ② Pitch ⑤ Color
- 1 Grey
 - 2 Blue
 - 3 Black
 - 4 Green
 - 5 Orange
 - 6 Red
 - 7 Transparent
 - 8 Yellow
 - 9 White
- ③ Poles
- 02 02Contacts
 - 03 03Contacts
 - ... 24 24Contacts
- ⑥ Customer Request 00-Standard

A	Total Pitch Tolerances			Nominal dimension range			T	≠	//																			
	over	to	in mm	over	to	in mm																						
0	30	53	70	90	115	150	250	350	0	30	53	70	90	115	150	200	250	0	over									
30	53	70	90	115	150	250	350	500	30	53	70	90	115	150	200	250	320	10	all									
+0.18±0.20	+0.25	±0.3	±0.35	±0.4	±0.44	±0.50	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.4	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.2	0.3	0.3	0.2	0.3	0.5

4	PIN HEADER	XX	P	BRASS		Tin Plated			
3	CAGE	XX	P	BRASS		Ni Plated			
2	SCREWS	XX	P	STEEL		Zn Plated			
1	HOUSING	XX	1	PA66 UL94V-0		SEE NOTE			
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL		NOTE			
DWG	MYZ	DATE	21.06.07	SIZE	A4	UNITS	mm	SHEET/OF	1 / 1
CHK	DATE	SCALE	1:1						
APP	DATE								

Gothen 宁波冠泰电子有限公司
NINGBO GOLDTEN ELECTRONICS CO., LTD. DWGNO. GT129R-7.5-XXP-XX-00 XXXXX