
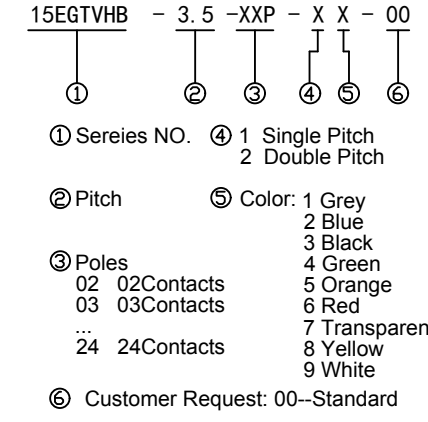


REV	CONTENT	CHK	DATE
V0.0	CONTENT	CXL	20.05.11

Electrical :

- 1. Rated Voltage : UL 300V IEC 250V
- 2. Rated Current : 8A 8A
- 3. Withstanding Voltage : AC1600V/1Min.
- 4. Operating Temperature : -40°C~+105°C
- 5. RoHS Compliance
- 6. Safety Approval :
- 7. "★" is the key quality control point

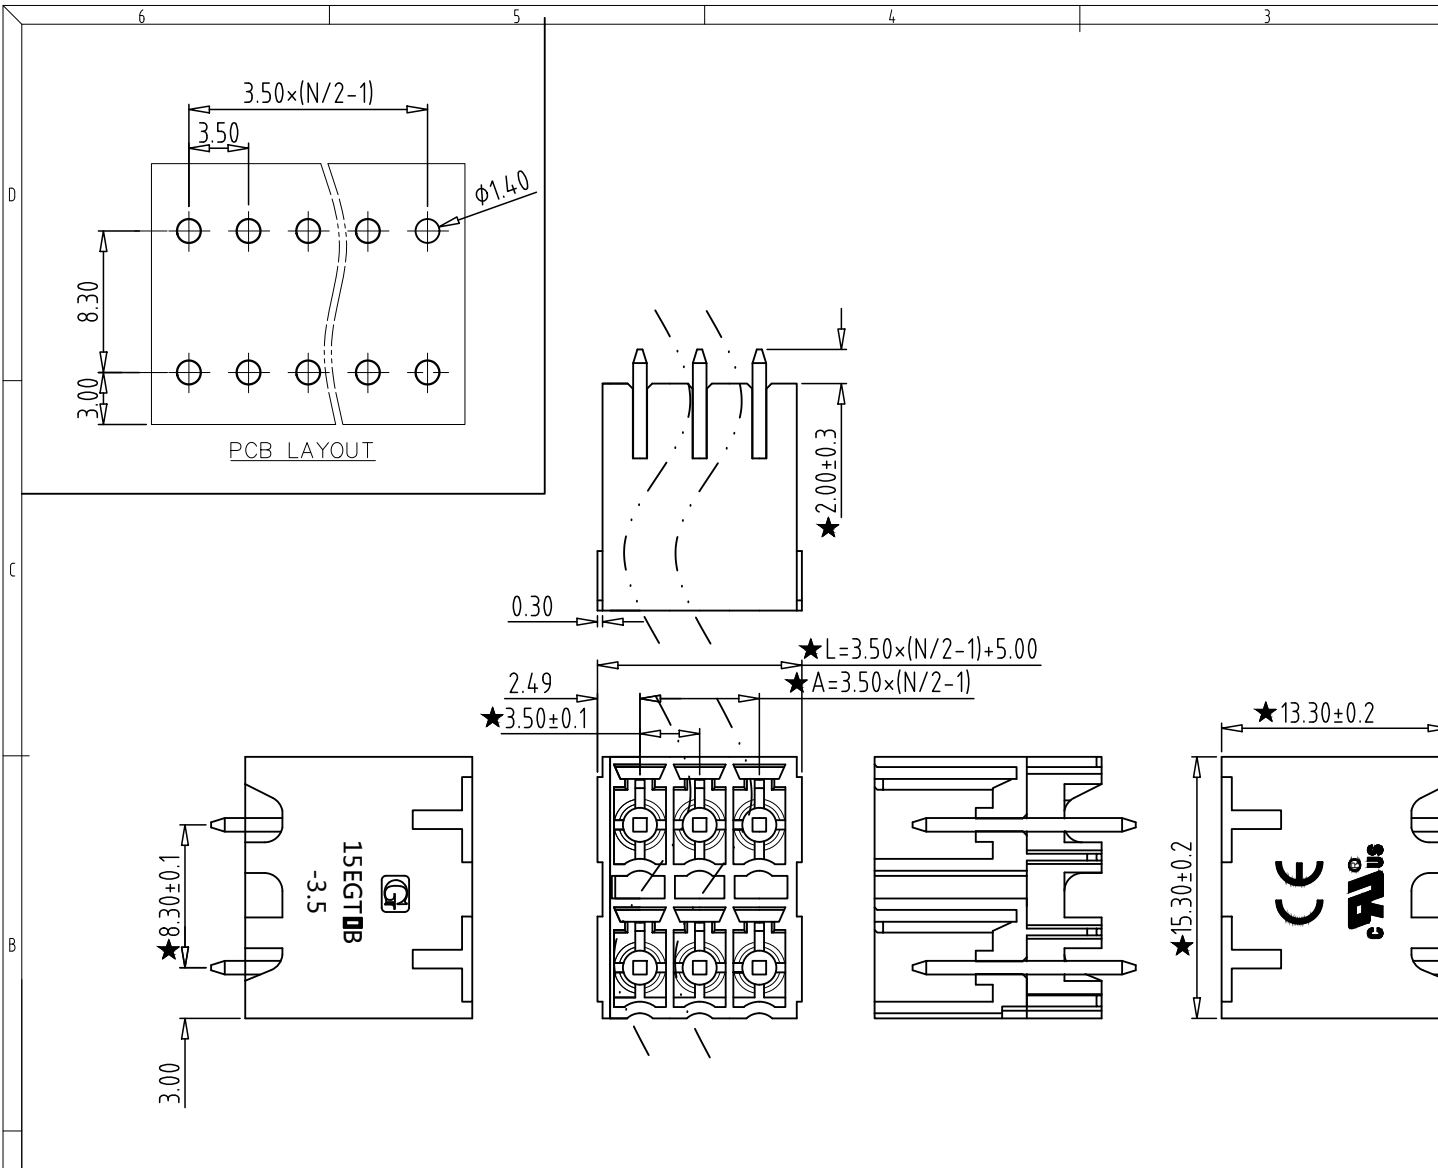

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	=	-	//			
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	0	100	150
0	30	53	70	90	115	150	250	350	500	0	30	53	70	90	115	150	200	250	320	0	10	all	to	0	100	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.3	0.2	0.3	0.5		

2	PIN	XX	N	BRASS	Tin Plated			
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE			
ITEM	NAME OF PART		NO. OF PART	Q'TY	MATERIAL	NOTE		
DWG.	CXL	DATE	20.05.11	SIZE	A4	UNITS mm	SHEET/OF	1 / 1
CHK.	DATE			SCALE	1:1			
APP.	DATE				15EGTVHB-3.5-XXP-XX-00			
宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.					DWGNO.	XXXXX		