
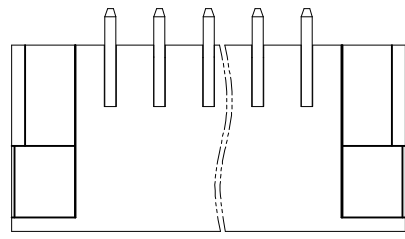


REV	CONTENT	CHK	DATE
V0.0	CONTENT	DLL	20.06.30

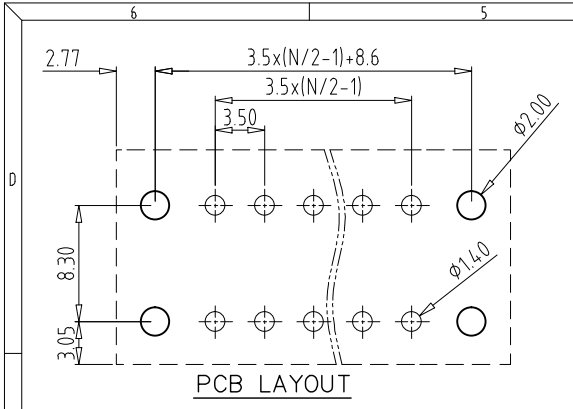

NOTES1:



- UL Standard
- 1.Rated voltage/current : 300V/8A
- 2.Withstanding voltage : AC1600V/1Min
- IEC Standard
- 1.Rate impulse voltage(KV) : 2.5KV
- 2.Rate voltage(V) : 250V
- 3.Rate current(A) : 8A

NOTES2:

- 1.Pitch : 3.5mm
- 2.Poles : N=04~48P
- 3.Operating temperature : -40℃~+130℃
- 4.RoHS Compliance
- 5."★"Point refers to the quality control point.

15EGTVHBM - 3.5 - XXP - X X - 00

- Customer Request: 00-Standard
- Color: 1 Grey, 2 Blue, 3 Black, 4 Green, 5 Orange, 6 Red, 7 Transparent, 8 Yellow, 9 White
- Single Pitch, Double Pitch
- Poles: 02 02Contacts, 03 03Contacts, ..., 20 20Contacts
- Pitch
- Series No

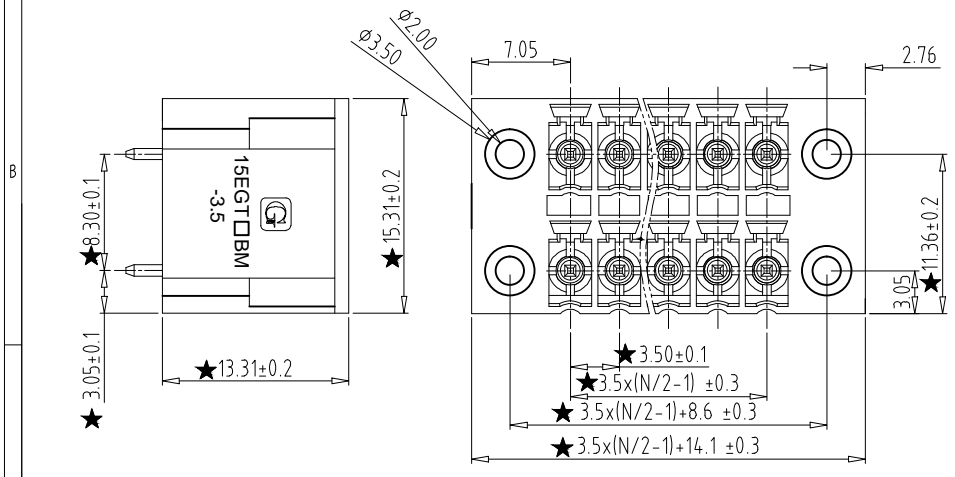

Total Pitch Tolerances in mm										Nominal dimension range in mm										≡		—		//	
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	250	350	500	0	30	53	70	90	115	150	200	250	320	0	over	0	100	0	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.4	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5	

1	Housing	XXXXXX	1	PA66	UL94V-0
1	Pin	XXXXXX	2P	Brass	Tin Plated
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	DLL	DATE	20.06.30	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE		SCALE	1:1	
APP.	DATE				
NAME			15EGTVHBM-3.5-XXP-XX-00		
DWGNO.			XXXX		

Golten 宁波冠泰电子有限公司
NINGBO GOLTEN ELECTRONICS CO., LTD.