




REV	CONTENT	CHK	DATE
VO.0	CONTENT	MYZ	21.07.10
VO.1	依实物修正图面	YL	22.08.18

Electrical :


- 1. Rated Voltage : **UL 300V**      **IEC 250V**
- 2. Rated Current : **8A**      **7A**
- 3. Torque Value : **M2 , 1.77Lb.in**      **M2 , 0.2N.m**
- 4. Wire Range : **28-16AWG**      **0.5-1.5mm<sup>2</sup>**
- 5. Stripping Length : **6-7mm**
- 6. Withstanding Voltage : **AC1600V/1Min.**
- 7. Operating Temperature : **-40°C~+105°C**
- 8. RoHS Compliance
- 9. Safty Approval : **cULus CE**
- 10. "★" is the key quality control point

**15EGTKA - 3.5 - XXP - X X - 00**

- ① Series No.
- ② Pitch
- ③ Poles  
02 02Contacts  
03 03Contacts  
... 24 24Contacts
- ④ 1 Single Pitch  
2 Double Pitch
- ⑤ Color: 1 Grey  
2 Blue  
3 Black  
4 Green  
5 Orange  
6 Red  
7 Transparent  
8 Yellow  
9 White
- ⑥ Customer Request : 00--Standard

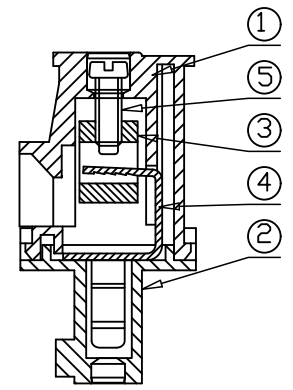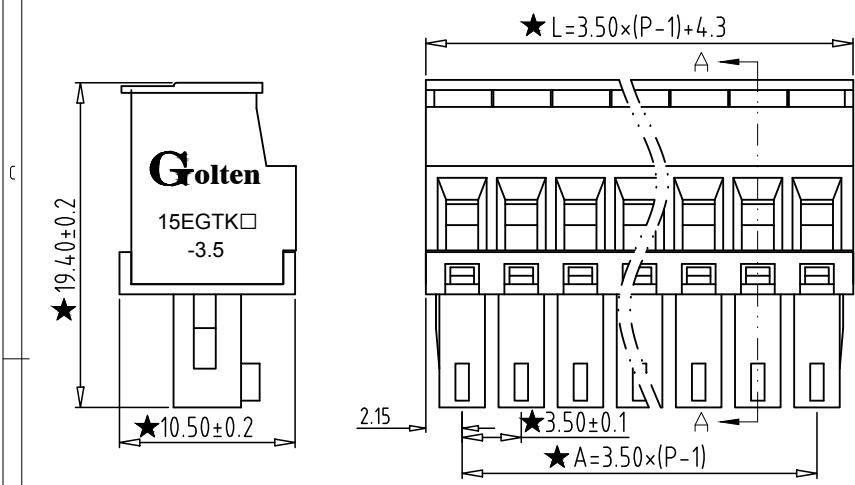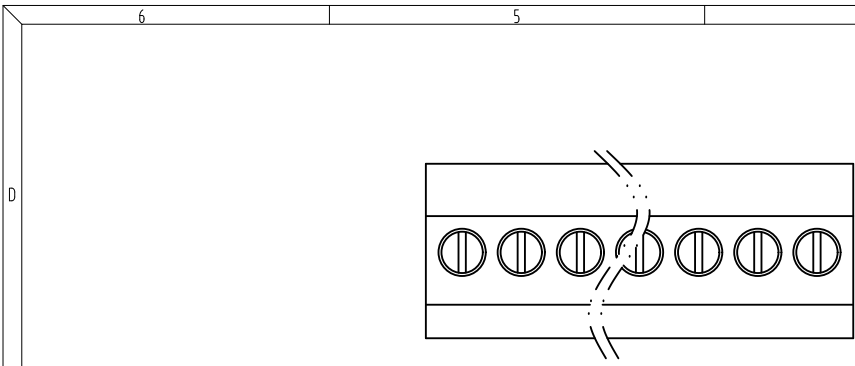

SECTION A-A

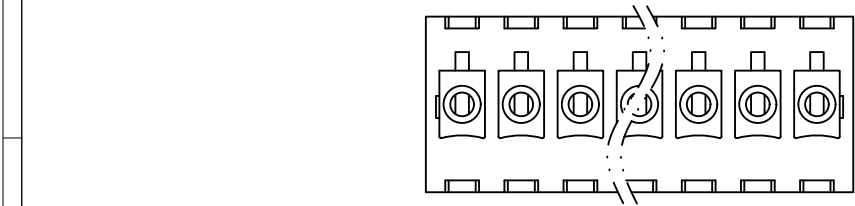

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥		≡		-		//	
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over
0	30	53	70	90	115	150	250	350	500	0	30	53	70	90	115	150	200	250	320	0	10	0	100	0	100	0	150
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to
30	53	70	90	115	150	250	350	500	500	30	53	70	90	115	150	200	250	320	10	10	100	100	150	0.2	0.3	0.3	0.5
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.2	0.3	0.5			

5	SCREW	XX	P	STEEL	Zn Plated	
4	CLAMP	XX	P	PHOSPHOR BRONZE	Ni Plated	
3	BLOCK	XX	P	BRASS	Ni Plated	
2	COVER	XX	1	PA66(UL94V-0)	SEE NOTE	
1	HOUSING	XX	1	PA66(UL94V-0)	SEE NOTE	
ITEM	NAME OF PART		NO. OF PART		Q'TY	
DWG.	MYZ	DATE	21.07.10		SIZE	
CHK.	DATE		SCALE		1:1	
APP.	DATE		NAME		15EGTKA-3.5-XXP-XX-00	
宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.					DWGNO.	XXXXX