
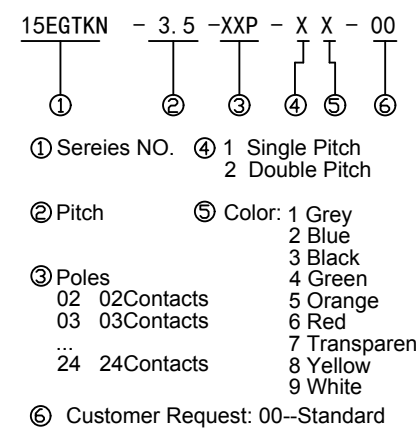


REV	CONTENT	CHK	DATE
V0.0	CONTENT	MYZ	21.06.24
V0.0	修正技术参数	LZW	23.04.13

Electrical :

- | | | |
|--|---------------|------------------------|
| | UL | IEC |
| 1. Rated Voltage : | 300V | 250V |
| 2. Rated Current : | 8A | 8A |
| 3. Wire Range: | 28-16AWG | 0.2-1.0mm ² |
| 4. Stripping Length : | 8-10mm | |
| 5. Withstanding Voltage : | AC1600V/1Min. | |
| 6. Operating Temperature : | -40°C~+105°C | |
| 7. RoHS Compliance | | |
| 8. Safty Approval : | cULus CE | |
| 9. ★" is the key quality control point | | |

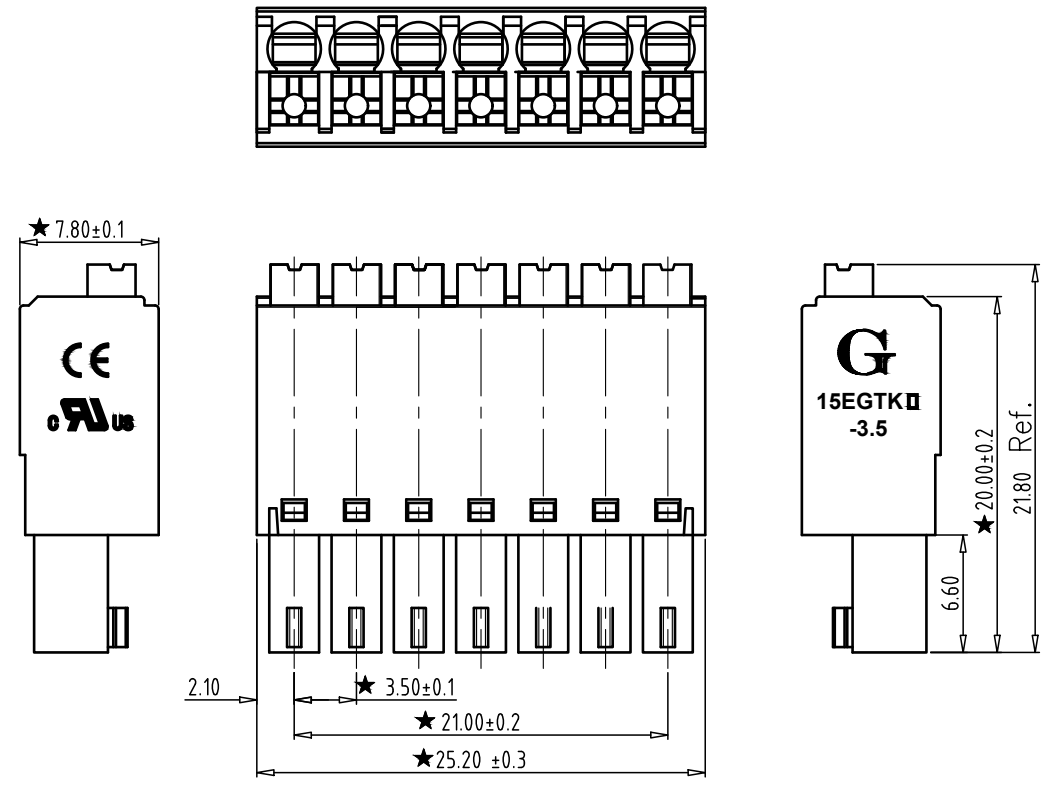

5	Clamp	XX	N	PHOSPHOR BRONZE	Tin Plated
4	Spring	XX	N	Stainless steel	/
3	Button	XX	N	POM UL94V-2	SEE NOTE
2	COVER	XX	1	PA66 UL94V-0	SEE NOTE
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	23.04.13	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK.	DATE		SCALE	1:1	
APP.	DATE		NAME	15EGTKN-3.5-XXP-XX-00	
宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.			DWGNO.	XXXXX	

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	=	-	//			
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	0	100	150
0	30	53	70	90	115	150	250	350	500	0	30	53	70	90	115	150	200	250	320	0	10	all	0	100	150	
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.3	0.2	0.3	0.5		