
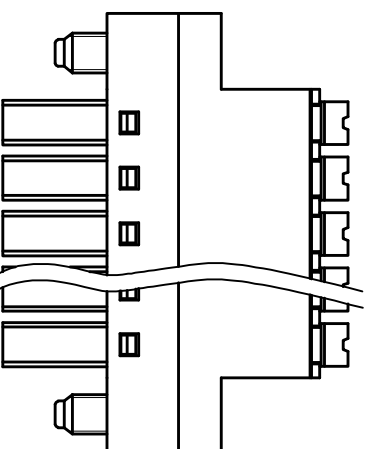
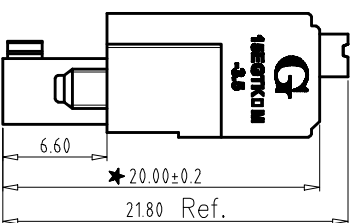
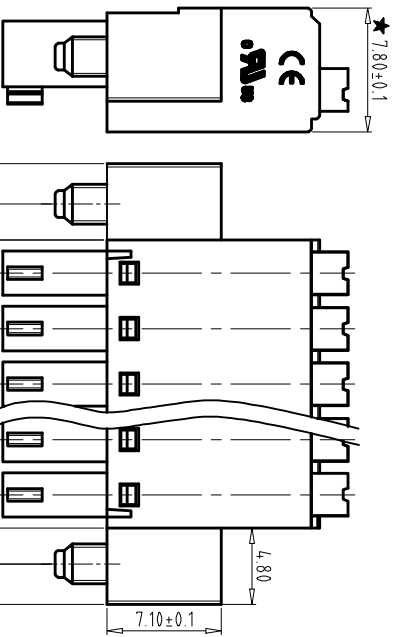


REV	CONTENT	CHK	DATE
V0.0	CONTENT	MYZ	21.06.24
V0.1	修正技术参数	LZW	23.04.13

Electrical :

- | | | |
|--|----------------------|------------------------------|
| 1. Rated Voltage : | UL | IEC |
| 2. Rated Current : | 300V | 250V |
| 3. Wire Range: | 8A | 8A |
| 4. Stripping Length : | 28-16AWG | 0.2-1.0mm² |
| 5. Withstanding Voltage : | 8-10mm | |
| 6. Operating Temperature : | AC1600V/1Min. | |
| 7. RoHS Compliance | -40°C--+105°C | |
| 8. Safety Approval : | UL | |
| 9. "X" is the key quality control point | | |

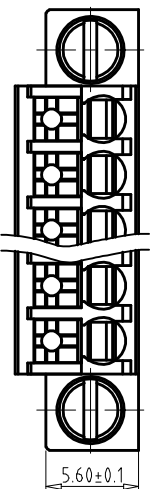

15EGTKNM - 3.5 -XYP - X X - 00

① ② ③ ④ ⑤ ⑥

① Series NO. ④ 1 Single Pitch
② Double Pitch

② Pitch ⑤ Color: ① Grey

③ Poles ② Blue

④ 02 Contacts ③ Black

⑤ 03 Contacts ④ Green

⑥ ⑦ Transparent ⑤ Orange

⑦ ⑧ Yellow ⑥ Red

⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿

⑳ 24 Contacts ㉑ 00 ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿

㉑ 24 Contacts ㉒ 00 ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿

6	Screw	XX	2	STEEL	Zn Plated
5	Clamp	XX	N	PHOSPHOR BRONZE	Tin Plated
4	Spring	XX	N	Stainless steel	/
3	Button	XX	N	POM UL94V-2	SEE NOTE
2	COVER	XX	1	PA66 UL94V-0	SEE NOTE
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG	LZW	DATE	23.04.13	SIZE	A4 UNITS mm SHEET/OF 1 / 1
CHK	DATE	SCALE	1:1		
APP	DATE				

Golden 宁波冠泰电子有限公司
NINGBO GOLDTEN ELECTRONICS CO., LTD. DWGNO. XXXXX

Total Pitch Tolerances		Nominal dimension range	
in mm	over	in mm	over
0	to	0	to
30	to	30	to
53	to	53	to
70	to	70	to
90	to	90	to
115	to	115	to
150	to	150	to
250	to	250	to
350	to	350	to
500	to	500	to
30	to	30	to
53	to	53	to
70	to	70	to
90	to	90	to
115	to	115	to
150	to	150	to
200	to	200	to
250	to	250	to
320	to	320	to
10	to	10	to
100	to	100	to
150	to	150	to